

pro slané vodiče


## KWV Lisovací kolíková koncovka

S plastovou izolací PA

Tepelná stálost od -40° C do + 125° C

Materiál: galvanicky pocínovaná měď

V souladu s normou DIN 46231

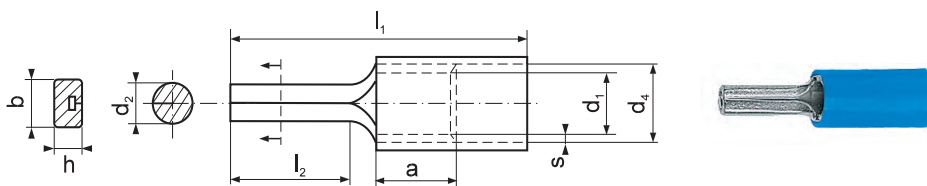

Průřez vodiče [mm <sup>2</sup> ]	Označení	s [mm]	d <sub>1</sub> [mm]	d <sub>2</sub> [mm]	d <sub>4</sub> [mm]	b [mm]	h [mm]	l <sub>1</sub> [mm]	l <sub>2</sub> [mm]	a [mm]	Váha [g/pc]	Balení [pc]	Lisovací nářadí
0,5 ÷ 1	KWV 1	0,8	1,6	1,9	3,2	-	-	22	10	5	0,60	100	PR33
	KWV 1-A	0,8	1,6	1,9	3,2	-	-	24	12	5	0,75	100	RE6
	KWV 1-20	0,8	1,6	1,9	3,2	-	-	33	20	5	0,85	100	E11-6
1,5 ÷ 2,5	KWV 2,5	0,8	2,3	1,9	3,9	-	-	22	10	5	0,68	100	PP8
	KWV 2,5-A	0,8	2,3	1,9	3,9	-	-	24	12	5	0,68	100	PP19
	KWV 2,5-20	0,8	2,3	1,9	3,9	-	-	33	20	5	0,95	100	
4 ÷ 6	KWV 6	1	3,6	2,7	5,6	-	-	26	10	6	1,60	100	PR33, E11-6, RE6, PP8, PP19

Barvy izolace

Standardní verze: okraje trubkové části jsou přiletované.

Izolace ve třídě VO podle individuálních objednávek, např. KWV 6-VO

