
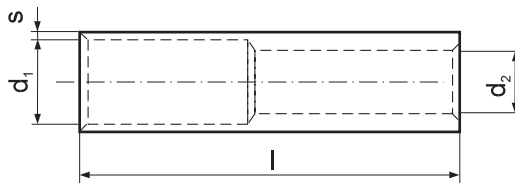


# ALR Hliníková trubková redukce

pro jednoduché a slané AL vodiče

Materiál: hliník



Průřez vodiče rm/sm [mm <sup>2</sup> ]		Označení	s [mm]	d <sub>1</sub> [mm]	d <sub>2</sub> [mm]	l [mm]	Lisovací čelisti	Lisovací nářadí
z	na							
25	16	ALR 25-16	2,6	6,8	5,5	75	12	
35	16	ALR 35-16	3	8	5,5	90	14	PR240, PRZ240, HR100-U, H120S-U, GU120, HR300, HRZ300, GU300, G0300, GZ300, EPZ300
	25	ALR 35-25			6,8			
50	25	ALR 50-25	3,1	9,8	6,8	90	16	
	35	ALR 50-35			8			
70	25	ALR 70-25	3,65	11,2	6,8	110	18	PR95A, PR240, PRZ240, HR100-U, H120S-U, GU120, HR300, HRZ300, GU300, G0300, GZ300, EPZ300
	35	ALR 70-35			8			
	50	ALR 70-50			9,8			
95	25	ALR 95-25	4,4	13,2	6,8	110	22	
	35	ALR 95-35			8			
	50	ALR 95-50			9,8			
	70	ALR 95-70			11,2			
120	35	ALR 120-35	4,15	14,7	8	110	22	PR240, PRZ240, HR300, HRZ300, GU300, EPZ300, G0300, GZ300, GU625
	50	ALR 120-50			9,8			
	70	ALR 120-70			11,2			
	95	ALR 120-95			13,2			
150	50	ALR 150-50	4,35	16,3	9,8	130	25	
	70	ALR 150-70			11,2			
	95	ALR 150-95			13,2			
	120	ALR 150-120			14,7			
185	70	ALR 185-70	5,1	18,3	11,2	130	28	HR300, HRZ300, GU300, EPZ300, G0300, GZ300, GU625
	95	ALR 185-95			13,2			
	120	ALR 185-120			14,7			
	150	ALR 185-150			16,3			
240	95	ALR 240-95	5,5	21	13,2	150	32	
	120	ALR 240-120			14,7			
	150	ALR 240-150			16,3			
	185	ALR 240-185			18,3			
	300	ALR 240-300			21			
300	150	ALR 300-150	5,35	23,3	16,3	160	34	
	185	ALR 300-185			18,3			
	240	ALR 300-240			21			
400	185	ALR 400-185	6,25	26	18,3	170	38	
	240	ALR 400-240			21			
	300	ALR 400-300			23,3			
500	240	ALR 500-240	7,5	29	21	180	44	GU625
	300	ALR 500-300			23,3			
	400	ALR 500-400			26			
	625	ALR 500-625			29			
625	300	ALR 625-300	8,5	33	23,3	190	52	
	400	ALR 625-400			26			
	500	ALR 625-500			29			

Výroba jiných rozměrů než jsou uvedené v tabulce – na poptávku.